

INTERNATIONAL STANDARD

ISO
11784

Second edition
1996-08-15

Radio-frequency identification of animals — Code structure

Identification des animaux par radiofréquence — Structure du code



Reference number
ISO 11784:1996(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 11784 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, subcommittee SC 19, *Agricultural electronics*.

This second edition cancels and replaces the first edition (ISO 11784:1994), which has been technically revised.

© ISO 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Radio-frequency identification of animals — Code structure

1 Scope

This International Standard specifies the structure of the radio-frequency (RF) identification code for animals.

RF identification of animals requires that the bits transmitted by a transponder are interpretable by a transceiver. Usually the bit stream contains data bits, defining the identification code and a number of bits to ensure correct reception of the data bits. This International Standard specifies the structure of the identification code.

This International Standard does not specify the characteristics of the transmission protocols between transponder and transceiver. These characteristics are the subject of ISO 11785.

NOTE — A procedure for the allocation of the manufacturer's code is under study.

2 Conformance

The unique individual identification codes transmitted by a transponder are in conformance with this International Standard provided they meet the requirements of clause 5.

3 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 3166:1993, *Codes for the representation of names of countries*.

4 Definitions

For the purposes of this International Standard, the following definitions apply.

4.1 animal code: Bit pattern to identify an animal.

4.2 bit pattern: Sequence of binary digits or bits [0, 1].

4.3 code field: Group of bits in the identification code with a specific meaning.

4.4 country code: Bit pattern to define the country where the transponder was issued.

4.5 data block: Additional group of bits with a specific meaning.

4.6 flag: Single bit with a specific meaning.

4.7 identification code: Part of the code that is used for identification (control codes such as header, trailer and checksum are excluded).

4.8 manufacturer's code: Bit pattern identifying the manufacturer of the transponder.

4.9 national identification code: Code field with a unique number within a country.

4.10 transceiver: Device used to communicate with a transponder.

4.11 transponder: Device which transmits its stored information when activated by a transceiver and may be able to store new information.

5 Description of code structure

The code in the transponder is split up into a number of code fields, each with its own meaning. Each field is coded in natural binary with the high-order bit being leftmost. The structure of the code shall be as specified in table 1. Bit number 1 in the code is the most

significant bit (MSB); bit number 64 is the least significant bit (LSB).

The combination of country code and national identification code provides a unique worldwide identification number.

Table 1 — Code structure

Bit No.	Information	Combinations	Description
1	Flag for animal (1) or non-animal (0) application	2	This bit signals whether the transponder is used for animal identification or not. In all animal applications this bit shall be 1.
2 - 15	Reserved field	16 384	Fourteen bits of code are reserved for future use.
16	Flag indicating the existence of a data block (1) or no data block (0)	2	This bit signals that additional data is to be received (e.g. physiological data, measured by a device which combines identification and monitoring). This bit shall be 1 if additional information is appended to the identification code, otherwise it shall be 0.
17 - 26	ISO 3166 numeric-3 country code	1 024	Country codes from 900 to 998 may be used to refer to individual manufacturers of transponders. Country code 999 is used to indicate that the transponder is a test transponder and need not contain a unique identification number.
27 - 64	National identification code	274 877 906 944	Unique number within a country.

NOTES

- 1 The method to distinguish between animal and non-animal applications using bit No. 1 allows the code structure to be recognized electronically. However, this requires that future standards on RF identification in other fields will adhere to this convention.
- 2 The length of the national identification code was chosen to have enough combinations available for all animals in a large country. Moreover, the uniqueness of a code is expected to be maintained over thirty years.
- 3 It is a national responsibility to ensure the uniqueness of the national identification code. If necessary number series may be allocated to species and/or manufacturers, but this will not be standardized. Ideally every country should maintain a central database in which all issued codes are stored, together with a reference to the database where the information concerning the associated animal can be retrieved.

ICS 65.040.10

Descriptors: agricultural equipment, radiocommunications, electronic equipment, livestock equipment, livestock, domestic animals, identification methods, radiolocation, information interchange, codes, data codes.

Price based on 2 pages

INTERNATIONAL
STANDARD

ISO
11785

First edition
1996-10-15

**Radio-frequency identification of animals —
Technical concept**

Identification des animaux par radiofréquence — Concept technique



Reference number
ISO 11785:1996(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 11785 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 19, *Agricultural electronics*.

Annexes A and B form an integral part of this International Standard. Annex C is for information only.

© ISO 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

The technical concept of animal identification described is based upon the principle of radio-frequency identification (RFID). ISO 11785 is applicable in connection with ISO 11784 which describes the structure and the information content of the codes stored in the transponder.

The International Organization for Standardization (ISO) draws attention to the fact that compliance with clause 6 and annex A of this International Standard may involve the use of patents concerning methods of transmission.

ISO takes no position concerning the evidence, validity and scope of these patent rights.

The following patent holder has assured ISO that he will not exert its patent rights concerning FDX B technology:

NEDAP Agri BV
Postbus 9
NL-7255 ZG Hengelo

Tel. + 31 575 46 38 00
Fax + 31 575 46 37 25

The following patent holders have assured ISO that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holders of these patents rights are registered with ISO:

Destron Fearing Corporation
490 Villaume Avenue
USA-South St. Paul, MN 55075-2445

Tel. + 1 612 455 1263
Fax + 1 612 455 0413

Datamars SA
Via Ponteggia
CH-6814 Cadempino-Lugano

Tel. + 41 91 58 27 01
Fax + 41 91 58 27 41

Texas Instruments Limited
800 Pavilion Drive
Northampton Business Park
GB-Northampton NN4 7YL

Tel. + 44 1604 663 000
Fax + 44 1604 663 001

TROVAN Limited
c/o Gruenguertelstr. 12
D-50996 Cologne

Tel. + 49 221 391 431
Fax + 49 221 395 893

Attention is moreover drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights other than those identified above. ISO shall not be held responsible for identifying any or all such patent rights. In that connection, additional correspondences were received from two other companies (AVID and EID) not willing to forward pertinent declaration in accordance with the current ISO Directives.

Copies of declarations and statements received from all the above mentioned companies are available upon request to the ISO Central Secretariat.

Radio-frequency identification of animals — Technical concept

1 Scope

This International Standard specifies how a transponder is activated and how the stored information is transferred to a transceiver.

2 Conformance

Transponders are in conformance with this International Standard provided they meet the requirements given in clause 6 of this International Standard. Transceivers are in conformance with this International Standard provided they meet the requirements given in clause 6 and annex A, if the latter is applicable.

In order to allow a smooth transition from the different transponders presently in use to those complying with this International Standard, transponders meeting the requirements of annex A may be applied for a transition period of two years from the date of the first edition of this International Standard.

3 Normative references

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 11784:1996, *Radio-frequency identification of animals — Code structure*.

4 Definitions

For the purposes of this International Standard, the following definitions apply.

- 4.1 activation field:** Electromagnetic field transmitted by a transceiver to energize and/or activate a transponder.
- 4.2 activation frequency:** Frequency of the activation field.
- 4.3 activation period:** Time duration of the activation signal.

4.4 bit rate: Number of bits transmitted per second.

4.5 differential bi-phase encoding: Method of encoding in which data bit 0 is represented by a mid-bit transition; data bit 1 is represented by no transition; and there is always a transition in between two bits.

4.6 encoding: One to one relationship between basic information elements and modulation patterns.

4.7 error detection code: Bits that contain information which can be used to detect errors.

4.8 frequency shift keying: Binary information is superimposed onto a carrier electromagnetic field by shifting between discrete frequencies of the field.

4.9 full duplex: Method of information exchange in which the information is communicated while the transceiver transmits the activation field.

4.10 half duplex: Method of information exchange in which the information is communicated after the transceiver has stopped transmitting the activation field.

4.11 header: Bits transmitted before the useful information, uniquely identifying the start of a page, which may also be used for synchronization of the transponder and the transceiver.

4.12 identification code: 64 bits of the identification telegram which are specified in ISO 11784.

4.13 identification telegram: The total identification message (header, identification code, error detection code and trailer), possibly repeatedly transmitted by the transponder upon activation.

4.14 mobile transceiver: Transceiver that is not connected to other transceivers when these are in its vicinity to synchronize activation periods and pauses.

4.15 modulation: Method of superimposing information onto an electromagnetic field by means of varying a specific parameter of the field.

4.16 non-return to zero encoding: Method of encoding in which data bit 1 is a high signal and data bit 0 is a low signal.

4.17 page: A coherent part of the communicated information.

4.18 phase shift keying: Binary information is superimposed onto a carrier electromagnetic field by introducing discrete phase shifts of the field.

4.19 stationary transceiver: Transceiver that is connected to other transceivers when these are in its vicinity to synchronize activation periods and pauses.

4.20 trailer: Bits transmitted after the error detection code; the content of which is dependent upon the value of the flag for an additional data block which is specified in ISO 11784.

4.21 transceiver: Device used to communicate with a transponder.

4.22 transponder: Device which transmits its stored information when activated by a transceiver and may be able to store new information.

5 Abbreviations

AM	amplitude modulation
BCC	block control character
CRC	cyclic redundancy check
DBP	differential bi-phase encoding
FDX	full duplex
FSK	frequency shift keying
HDX	half duplex
LSB	least significant bits
MSB	most significant bits
NRZ	non-return to zero encoding
PSK	phase shift keying
RFID	radio-frequency identification

6 Requirements

The system shall be defined in such a way that the FDX and HDX transponders can be read by one transceiver. Annex A describes the method that can be used to enhance the functionality of this transceiver to read certain installed base transponders which are not compatible with the FDX and HDX transponders described in this clause.

A stationary transceiver shall activate transponders using an activation field with an activation frequency of $(134,2 \pm 13,42 \times 10^{-3})$ kHz. The activation period shall be 50 ms. If an FDX signal is received during activation but is not validated, the activation period shall be extended until the identification telegram is validated, but not longer than 100 ms. Consecutively, there shall be a pause in the activation signal. If an HDX signal is received the pause shall last for 20 ms. If no HDX signal is detected within 3 ms after a 3 dB decay of the activation field, activation shall be resumed. For synchronization reasons, each tenth activation cycle shall have a fixed pattern of 50 ms activation and 20 ms pause (see annex C).

A mobile transceiver shall be able to detect the presence of additional active transceivers through the reception of activation signals. If no activation signal is detected within 30 ms, the mobile transceiver is out of reach of other active transceivers and shall use the activation protocol defined above for a stationary transceiver. If the mobile transceiver does detect an activation signal it shall wait for the rising edge of the next activation signal and shall activate during a fixed period of 50 ms.

The identification code shall be in accordance with ISO 11784. The identification code, the CRC error detection bits (see annex B) and the trailer shall be transmitted starting with the LSB and ending with the MSB.

In view of future enhancements, for example multi-page transponders incorporating sensors and/or writable memory, the identification telegram shall terminate in 24 trailer bits in which, for instance, information from sensors or the contents of trailing pages may be stored. If the flag for additional data blocks, which is specified in ISO 11784, is binary 0 the value of most of the trailer bits is unspecified. The value of the trailer bits for additional data blocks which have a flag equal to binary 1 will be defined by a future International Standard.

NOTES

- 1 Since errors in the trailer will not be detected by the error detection protocol of the identification telegram, it is not necessary to read these bits in order to correctly detect the identification code.
- 2 In most countries the use of transceivers as described in this International Standard is subject to regulations. Type approval from the national regulatory agencies may be required before they can be operated or traded in these countries.

6.1 Full duplex system

An FDX transponder receiving the activation field shall transmit its code during the activation period. The FDX transponder uses a modified DBP encoded sub-carrier which is amplitude modulated upon the radio frequency

carrier. Because the slope of a low-high transition is not infinitely steep, every low-high transition is advanced in time to a maximum of eight cycles to obtain optimal performance (see figure 1). The transponder shall send its message back using the frequency bands 129,0 kHz to 133,2 kHz and 135,2 kHz to 139,4 kHz. The duration of one bit is 32 activation field cycles. This corresponds to a bit rate of 4 194 bit/s.

NOTE — The basic frequency of the sub-carrier, containing the phase encoded data signal, is not influenced by the advancement in time of the low-high transition and remains 4 194 Hz (binary 1:180° phase shift; binary 0: no phase shift).

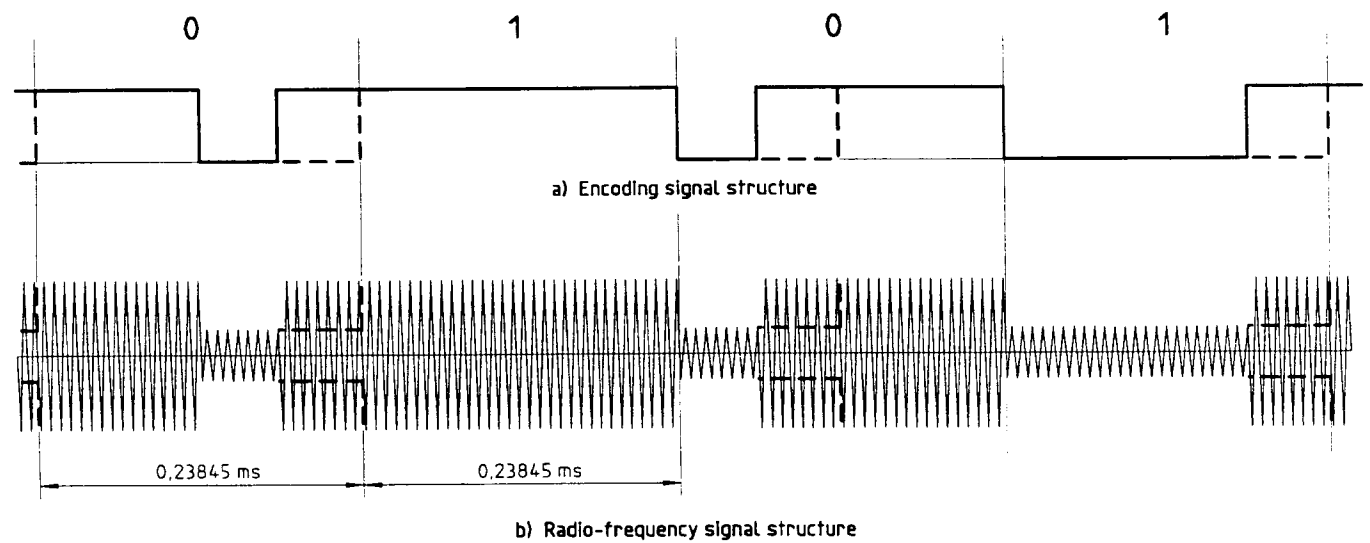


Figure 1 — Signal structures of the FDX identification telegram

The structure of the FDX identification telegram (see figure 2) is as follows:

- a header of 11 bits (00000000001) used to identify the start of the identification telegram;
- a 64-bit identification code transmitted in eight blocks of 8 bits;
- two blocks of 8 bits containing the 16 CRC error detection bits;
- three blocks of 8 bits containing the 24 trailer bits.

The error detection code is calculated solely over the identification code. Each block of 8 bits is trailed by a control bit with the value binary 1 to prevent the appearance of the header in the rest of the identification telegram.

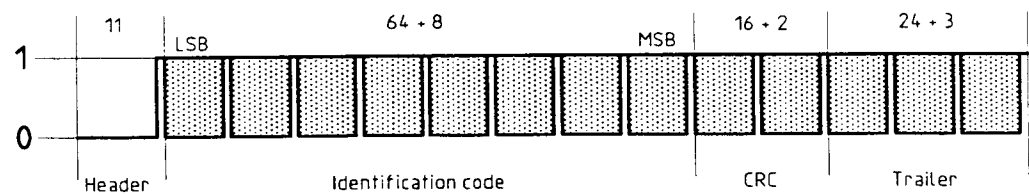


Figure 2 — Structure of the FDX identification telegram

6.2 Half duplex system

If no FDX signal was received during activation, or if an FDX signal was received and validated, the activation shall cease after 50 ms and an interruption of the activation field shall be maintained during at least 3 ms. The decay of the activation field from – 3 dB to – 80 dB shall be completed within 1 ms. An HDX transponder charged with energy during the activation uses the interruption to transmit its signal. The HDX transponder shall respond between 1 ms and 2 ms after a 3 dB decay of the activation signal. If no HDX signal is detected within 3 ms after a 3 dB decay of the activation signal, activation shall be resumed (see figure 3).

The HDX transponder uses FSK modulation at $(124,2 \pm 2)$ kHz to transmit a binary 1 and at $(134,2 \pm 1,5)$ kHz to transmit a binary 0. The encoding of the signal shall be NRZ. The duration of a bit is 16 cycles, corresponding to a bit rate of 8 387,5 bit/s for binary zeros and 7 762,5 bit/s for binary ones (see figure 4).

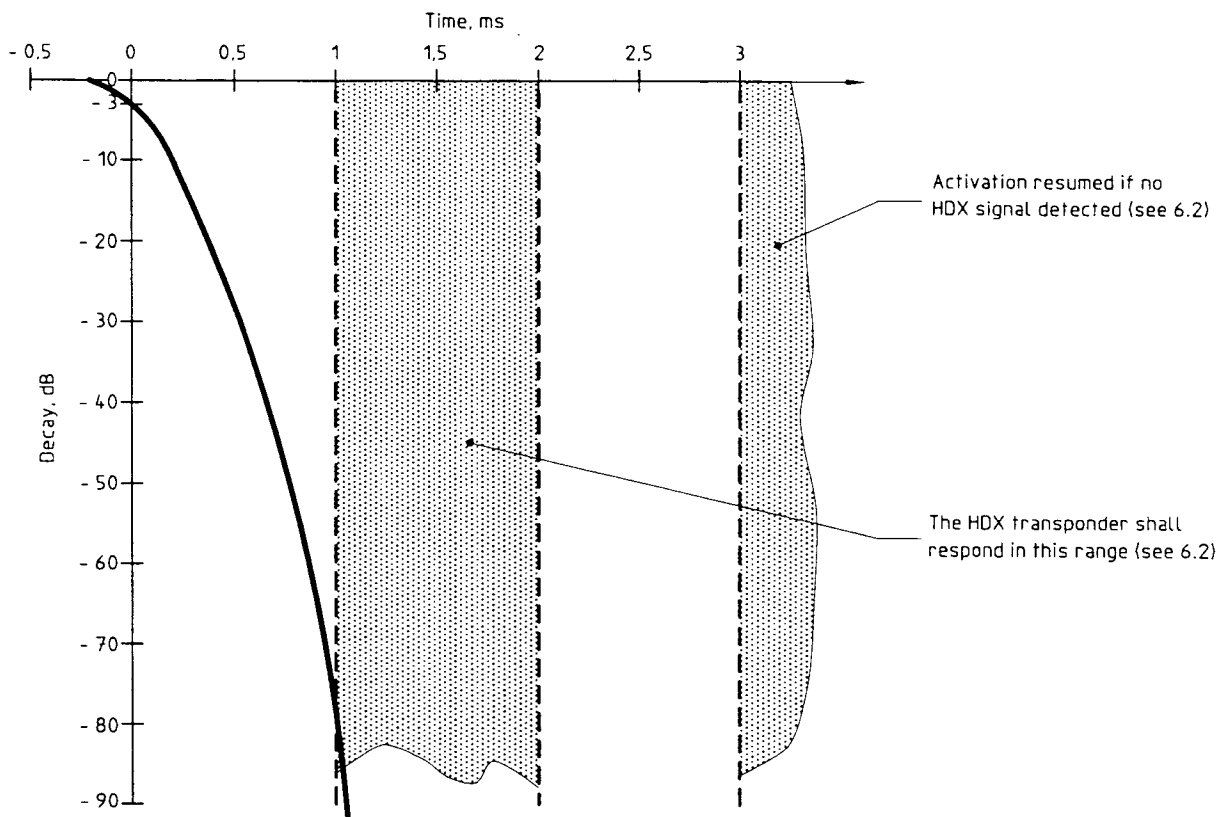


Figure 3 — Timing of the decay of the activation field

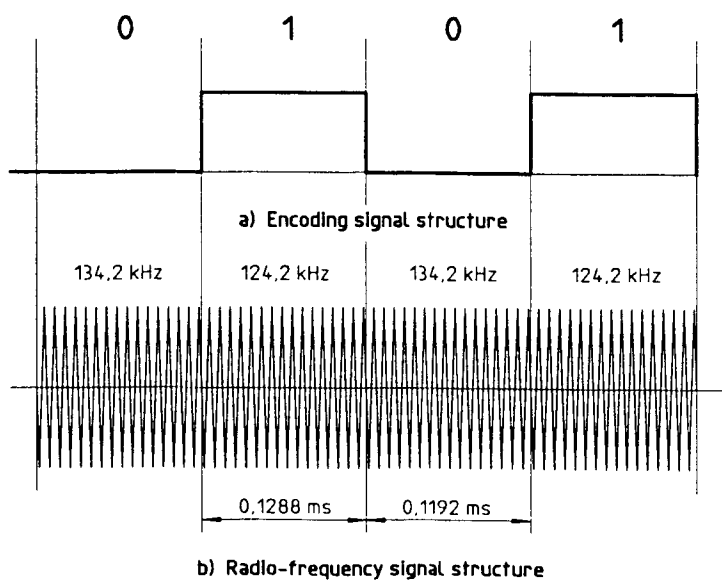


Figure 4 — Signal structures of the HDX identification telegram

The structure of the HDX identification telegram (see figure 5) is as follows:

- a header of 8 bits (01111110) used as a synchronization sequence;
- a 64-bit identification code;
- 16 CRC error detection bits;
- 24 trailer bits.

If the flag for additional data blocks is binary 0 the values of the first eight trailer bits shall be 01111110. The error detection code is calculated solely over the identification code.

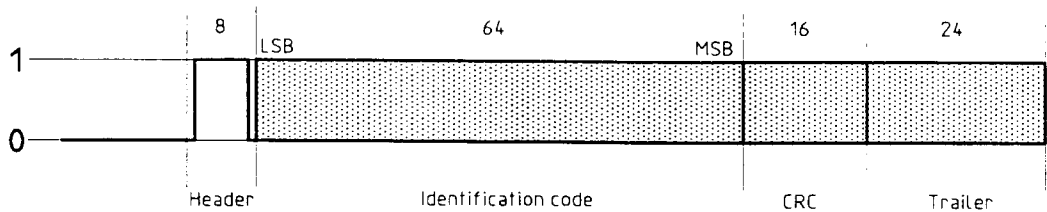


Figure 5 — Structure of the HDX identification telegram

Table 1 — Summary of the FDX and HDX systems

Parameter	FDX system	HDX system
Activation frequency	134,2 kHz	134,2 kHz
Modulation	AM-PSK	FSK
Return frequencies	129,0 kHz to 133,2 kHz 135,2 kHz to 139,4 kHz	124,2 kHz (1) 134,2 kHz (0)
Encoding	modified DBP	NRZ
Bit rate	4 194 bit/s	7 762,5 bit/s (1) 8 387,5 bit/s (0)
Telegram structure:		
— Header	11	8
— Identification code	64	64
— Error detection code	16	16
— Trailer	24	24
— Control bits	13	—

Annex A
(normative)

Integration of installed bases

A.1 Introduction

This International Standard specifies a transceiver capable of activating, receiving and interpreting an identification telegram transmitted by a transponder using either the FDX or the HDX method of transmission. However, a large population of animals has already been identified by means of transponders, in particular injectables ones, transmitting their identification telegram using one of the methods specified below. This annex specifies how this situation is to be coped with.

Clause A.2 specifies the technical characteristics of known and widely used technologies with which animals have been identified. Clause A.3 defines a concept showing how these technologies can be incorporated in a transceiver in accordance with the main body of this International Standard.

A.2 Technical characteristics of known and widely used technologies

A transceiver shall activate a transponder at either the frequency f_0 equal to 134,2 kHz or at the optimal frequency f_0 specified below.

A.2.1 Destron (FECAVA version) technology

The transponders have been designed for optimum performance to be activated at the frequency f_0 equal to $(125 \pm 12,5 \times 10^{-3})$ kHz. The transponder sends its message using AM-FSK. The duration of a binary state shall be 100 cycles of f_0 . A binary 0 is represented by 50 cycles at $f_0/10$, followed by 50 cycles at $f_0/8$ (see figure A.1). A binary 1 is represented by 50 cycles at $f_0/8$, followed by 50 cycles at $f_0/10$.

The identification telegram shall comprise 48 data bits, of which 35 are information bits. The structure of the identification telegram is shown in figure A.2.


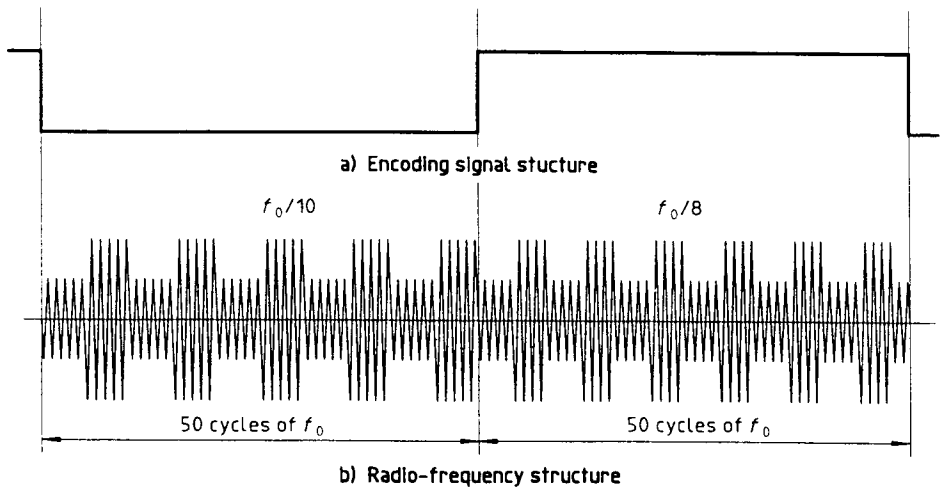


Figure A.1 — Signal structures of binary 0 of Destron (FECAVA version)

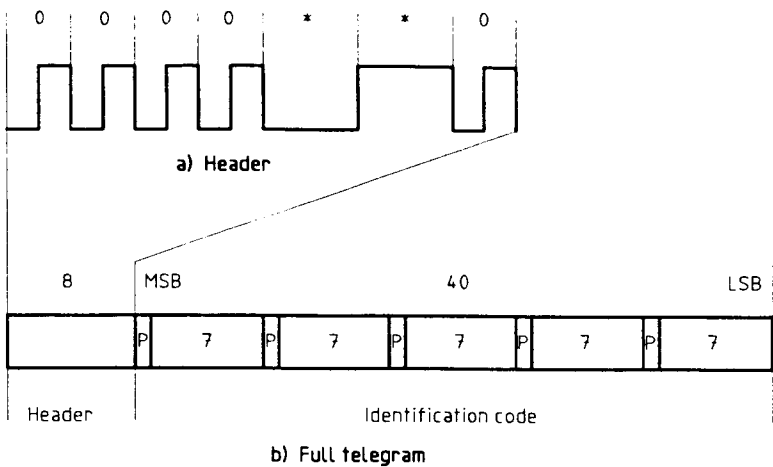

- * Encoding violation
- P Parity data bit, odd parity check

Figure A.2 — Structure of the Destron (FECVA version) identification telegram

The transceiver shall validate the unique identification code after reception of at least two identical telegrams.


A.2.2 Datamars technology

The transponders have been designed for optimum performance to be activated at the frequency f_0 equal to $(125 \pm 12,5 \times 10^{-3})$ kHz. The transponder sends its message using PSK in the frequency band $f_0/9$. The duration of a binary state (equal to one bit length) is 100 cycles of f_0 . The encoding of the message is Manchester. Each transition in the Manchester encoded signal is represented by a 120° phase shift. The Manchester transition representing a binary 0 of the original message consists of a -120° phase shift and that representing a binary 1 consists of a $+120^\circ$ phase shift.

The structure of the identification telegram (see figure A.3) comprises 62 bits as follows:

- 8 synchronization bits (0000 "1" "0" 0 where "1" and "0" are long bits which are 1,5 times longer than normal bits);
- 48 information bits, divided into 6 blocks of 8 bits [each block is supplemented with a parity (even) bit at the end].

The transceiver shall validate the unique identification code after reception of at least two identical telegrams.

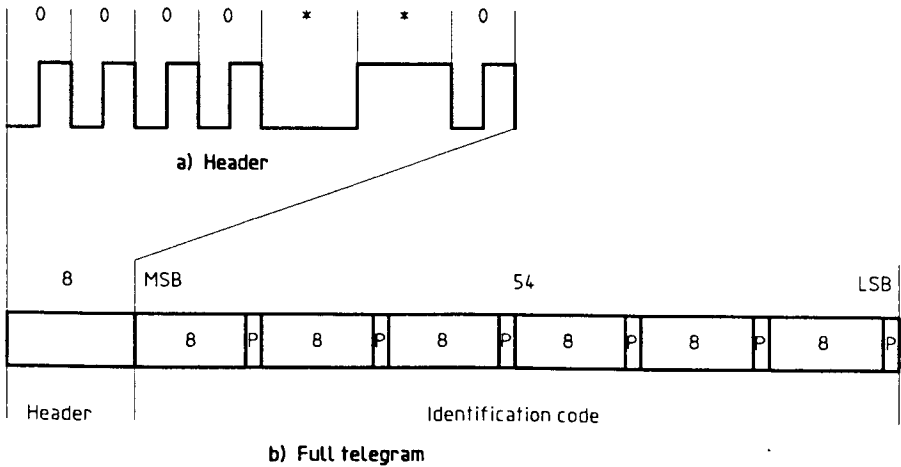

- * Encoding violation
- P Parity data bit, even parity check


Figure A.3 — The structure of the Datamars identification telegram

A.2.3 Trovan technology

The transponders have been designed for optimum performance to be activated at the frequency f_0 equal to (128 ± 3) kHz. The transponder sends its message using PSK in the frequency band $f_0/2$. The encoding is differential biphase. A binary 0 is represented by a phase shift of 180° . A binary 1 is represented by a phase shift of 0° . The duration of a binary state is 16 cycles of f_0 .

The structure of the identification telegram (see figure A.4) comprises 64 bits as follows:

- 8 synchronization bits (01111111);
- 39 information bits;
- 17 error detection bits.

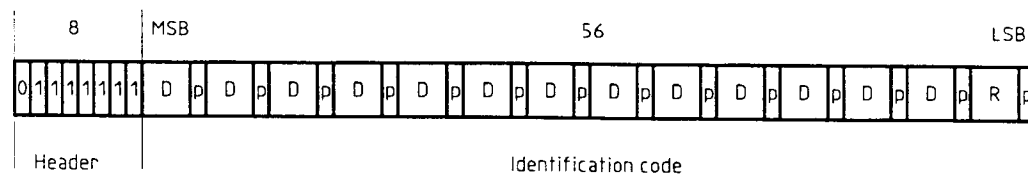


- D Data bits in groups of 3
- p Row parity, odd parity check
- R Column parity bits, odd parity check

Figure A.4 — The structure of the Trovan identification telegram

A.3 Concept for including the technologies in an FDX/HDX transceiver

This clause recommends a concept for the inclusion of the technologies described in section A.2.1, A.2.2 and A.2.3 in a transceiver. This concept consists of plugging a module for one or more of these technologies into the receiver part of the transceiver. Figure A.5 shows the operating mode. The default function is to read the FDX/HDX signal. The transceiver shall immediately switch back to the default function after reading a transponder which is in accordance with A.2.1, A.2.2 or A.2.3.

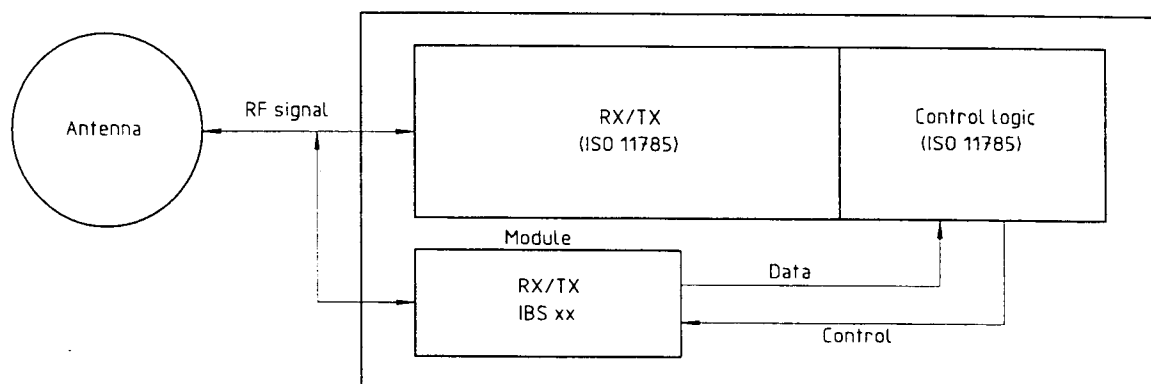

RX Receiver
TX Transmitter
IBS Installed base system

Figure A.5 — Schematic diagram of a transceiver combined with a module to read one of the technologies described in this annex

Annex B
(normative)

CRC check for error detection

B.1 Description

The CRC polynomial (0 x 1 021) is:

$$P(X) = X^{16} + X^{12} + X^5 + 1$$

The implemented version of the CRC check has the following characteristics:

- reverse CRC-CCITT (0 x 8 408);
- the data stream is always sent from transponder with LSB first;
- the CRC shift register is initialized to all 16 bits equal to zero;
- the first data bit (LSB data) EXORed with the LSB of the register is shifted into the register's MSB;
- after the 64 shifts (64 data bits are shifted) the register contains the BCC.

Figure B.1 shows the CRC check.

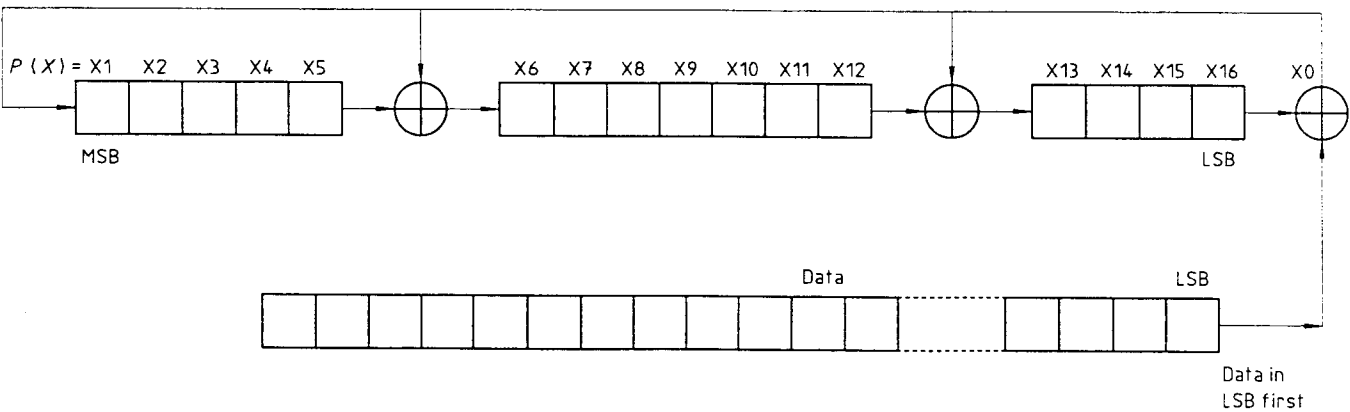


Figure B.1 — Schematic diagram of the CRC check

B.2 CRC check source code example

```
; BCCH and BCCL contain the 16 bit CRC. Both must be initialized to zero;
; GPR is a general purpose register for temporary storage (scratch register)
; A = Accumulator
; BTJZ   Bit Test Jump Zero
; SETC   Set Carry Flag
; CLRC   Clear Carry Flag
; RRC    Rotate Right Through Carry
```

```
; loop start
; test databit for high or low
        BTJZ    %RXDAT,DALOW        ; RXDAT=LOW
        SETC                    ; RXDAT=HIGH
        JMP     BCCGEN
DALOW    CLRC
BCCGEN   RRC     BCCH                ; Shift
        RRC     BCCL
        JNC     Q1L                ; C=0
        XOR     %?10000000,BCCH    ; C=1 --> Toggle Q16
Q1L      MOV     BCCH,GPR            ; Q16=0 ?
        AND     %?10000000,GPR
        JZ      D16L
        XOR     %?00001000,BCCL    ; Toggle Q4
        XOR     %?00000100,BCCH    ; Toggle Q11
D16L     continue with Program
; repeat loop for n bits
```

B.3 Reference

CCITT Recommendation G.706, *Frame alignment and cyclic redundancy check (CRC) procedures relating to basic frame structures defined in recommendation G.704.*

Annex C

(informative)

Synchronization

C.1 Introduction

A transceiver which is in the vicinity of a second transceiver is very likely to transmit its activation signal during the listening pause of the second transceiver and vice versa. The result is that neither transceiver will be able to receive the HDX telegram. This annex indicates how transceivers, operating according to the protocol defined in ISO 11785, can be synchronized to overcome this problem.

In practice, two basic types of transceiver can be encountered: stationary and mobile. Stationary transceivers can be interconnected to synchronize activation and listening periods; mobile transceivers must be able to synchronize without connecting wires.

C.2 Wired synchronization

To explain the concepts, five cases will be reviewed. In these cases four transceivers (TRX1-TRX4) continuously try to activate both FDX and HDX transponders using the activation protocol described in clause 6 of this International Standard. These transceivers are interconnected and synchronized with a simple two-level signal. This synchronization signal is "low" if no transponder telegram is being received; it is "high" if one of the transceivers is receiving a telegram.

Case 1: None of the transceivers have transponders in the field.

Case 2: The TRX2 transceiver detects an HDX transponder.

Since no FDX signals appear at any of the transceivers the activation signal does not need to be extended. The presence of the HDX signal (within 3 ms) is signalled by TRX2 by making the synchronization signal "high", which causes all other transceivers to provide a listening period of 20 ms.

Case 3: Transceiver TRX1 detects an FDX transponder.

The transponder transmits its data telegram almost instantaneously upon receiving the activation signal. If the transponder signal was received but not validated, the activation signal can be extended until the signal is received correctly or until a 100 ms time-out period has expired. During reception, TRX1 makes the synchronization signal "high".

Since no HDX signal is received, the following pause can be limited to 3 ms for all transceivers.

Case 4: Transceiver TRX2 detects an HDX transponder and TRX4 an FDX transponder during the same interrogation sequence.

The FDX transponder telegram is correctly received within 50 ms; consequently, the interrogation pattern is identical to case 2.

Case 5: Is similar to case 4 except that validation of the FDX telegram requires extension of the activation signal.

C.3 Wireless synchronization

A mobile transceiver by nature cannot directly be connected to other transceivers. To prevent a mobile transceiver interfering with the interrogation protocol of other transceivers it must be able to detect the presence of additional

active transceivers through the reception of activation signals. If no activation signal is detected within 30 ms, the transceiver is out of reach of other active transceivers and its activation signal will not interfere with other interrogation processes. The transceiver can therefore safely use the protocols defined in clause 6 of this International Standard. If the mobile transceiver detects an activation signal it must wait for the rising edge of the next activation signal and activate during a fixed period of 50 ms.

In all the cases described in clause C.2, and depicted in figure C.1, the mobile transceiver will be able to receive FDX transponders. In those cases where a stationary reader forces a 20 ms listening pause it will also be able to read HDX transponders. Each tenth cycle is fixed to 50 ms activation and 20 ms pause and will enable the mobile transceiver to receive an HDX telegram, regardless of the other transceivers.

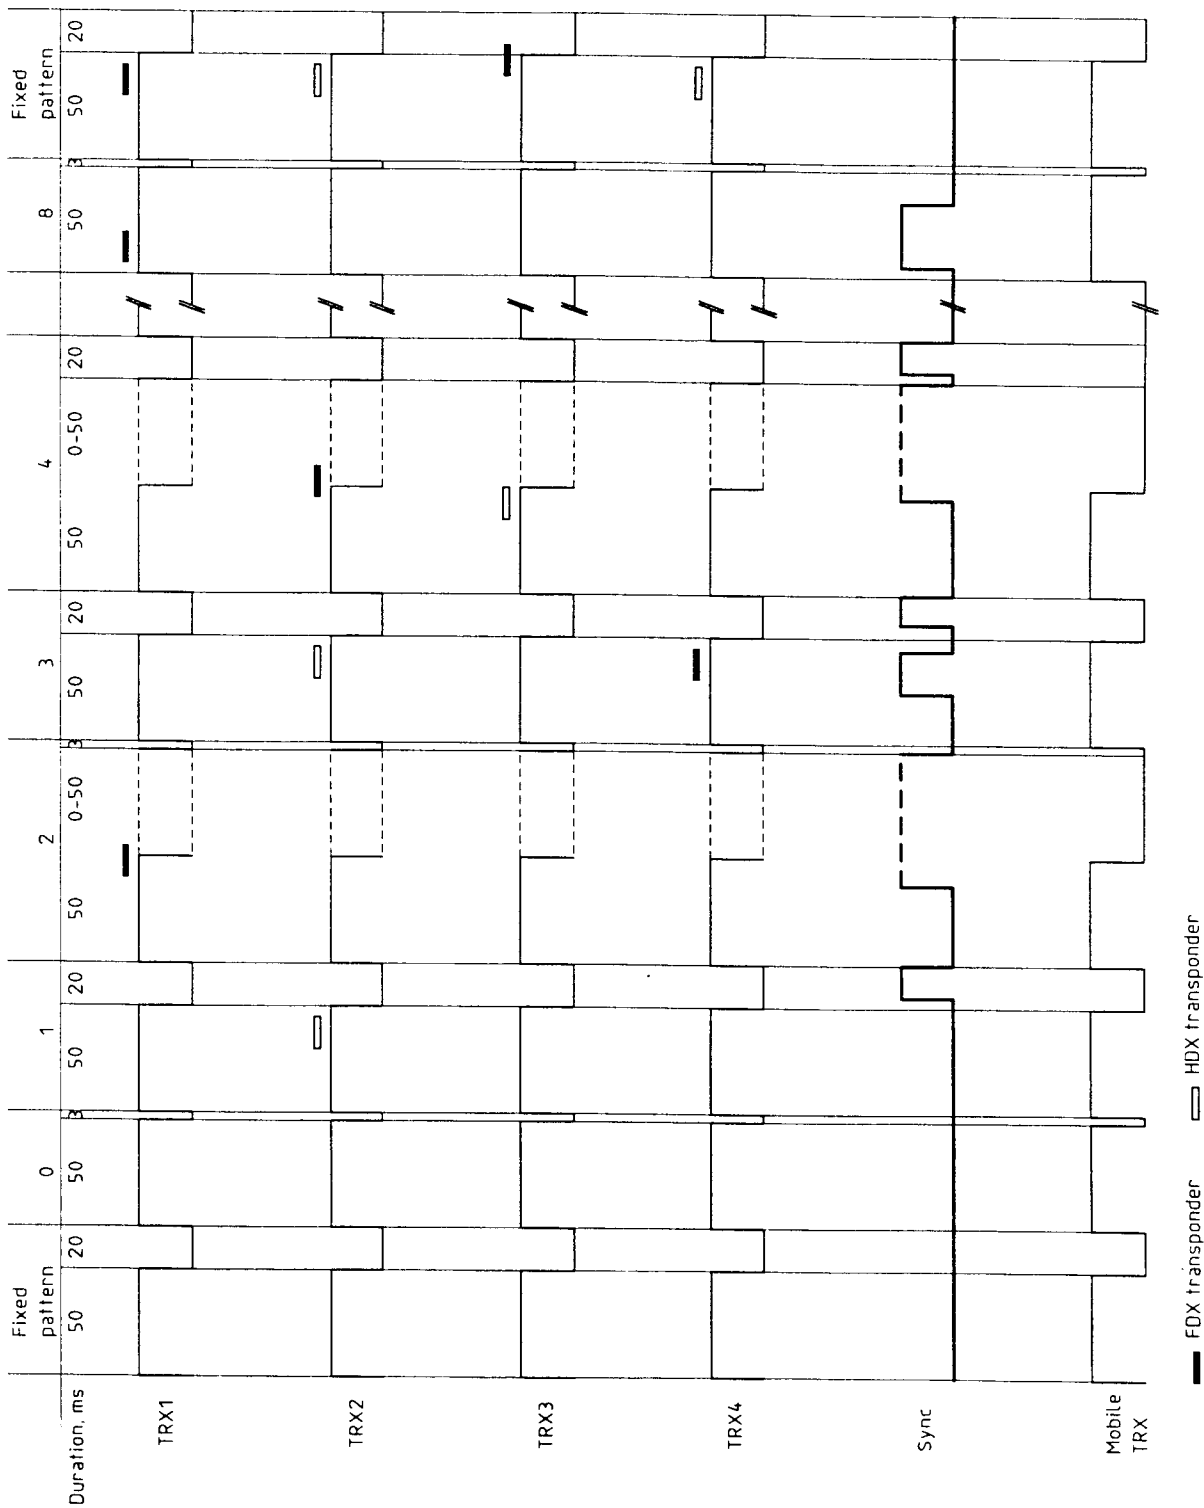


Figure C.1 — Interrogation protocol patterns

This page intentionally left blank

This page intentionally left blank

ICS 65.040.99

Descriptors: agricultural equipment, radiocommunications, electronic equipment, livestock equipment, livestock, domestic animals, identification methods, radiolocation, operating requirements, generalities.

Price based on 13 pages
