

UHF PVC Hang Tag

This tag is encapsulated with PVC, has advantages of compression resistance, bending resistance, and strong durability, suitable for complex clothing picking points and harsh application environments.

Physical Features:

Model:	PVC5330-1
Material:	PVC
Dimensions:	53 x 30 x 1 mm(L x W x T)
Weight:	3.4 g
Working Temp:	-40~+85°C
Storage Temp:	-40~+85°C
IP Code:	IP68

RFID Features:

RFID Standard:	ISO/IEC 18000-6C (EPC Gen2)
Chip Type:	Impinj Monza R6 / NXP UCode 7
Memory:	MR6: User - N/A; EPC - 96 bits; TID - 48 bits U7: User - N/A; EPC - 128 bits; TID - 96 bits
Read Range(2W ERP FCC):	8.0 m
Read Range(2W ERP ETSI):	7.0 m

Other Features:

Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Hang, Adhesive
Customization:	Logo, barcode/QR code, number printing, encoding, design, etc.
Package:	200 pcs/box
Application:	• Logistics sorting • Apparel retail and management • Assets tracking management, etc.




SCIVAS LIMITED

YOUR VISION, OUR FREQUENCY



RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

www.scivas.com Tel: +86-20-87097510

Dimensions:

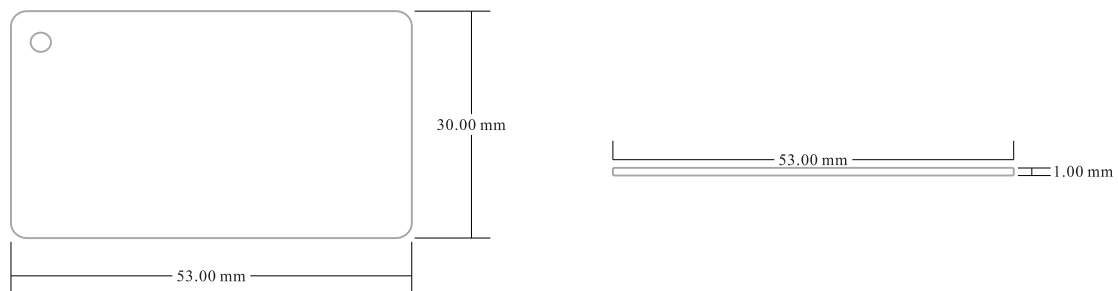

Read Range(on clothes):

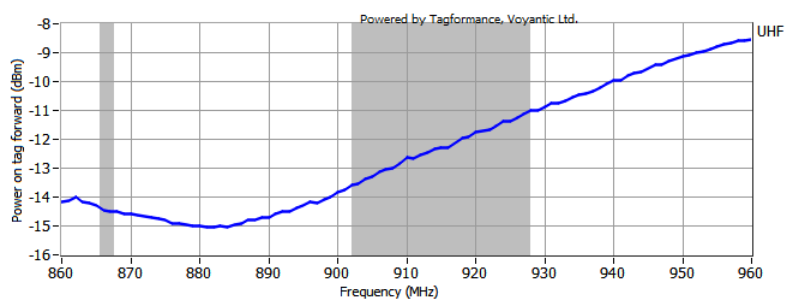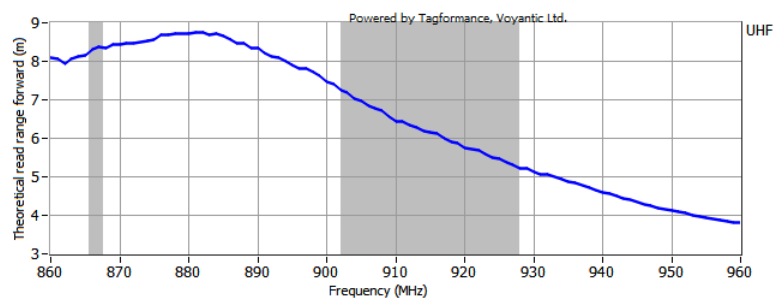

Application:

